


NEAT-70C / 120C

~ Ink Pot Type Pad Printing Machine ~

Ink is closed in "Ink pot" and the ring blade of ink pot squeegees
by reciprocating motion of die.

- Merit of "Ink Pot"**
- to prevent evaporating thinner
 - to keep the viscosity of ink stably
 - to reduce the diffusion of odor

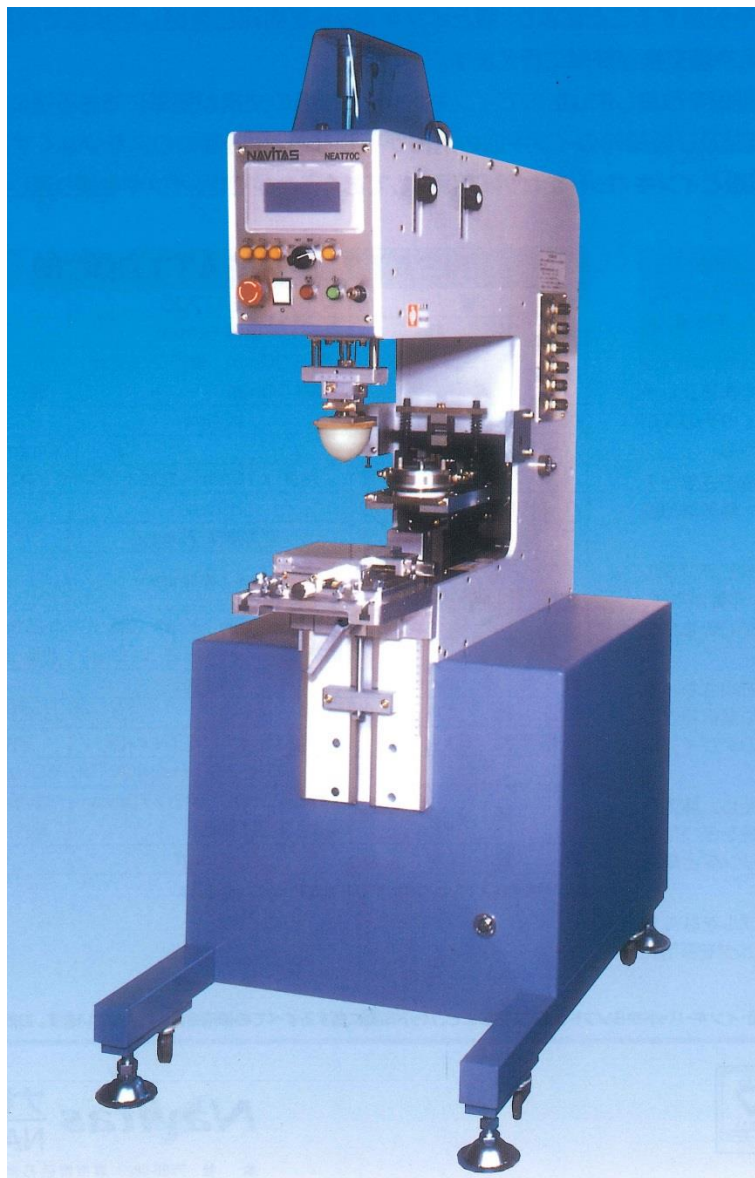

***Please kindly feel free to contact us as we can propose various plans about pad printing such as machine, ink, pad, software and so on.**

Other feature

- ◆ Reducing the consumption of ink compared to using ink plate
- ◆ Adopting emergency stop switch ----- pursuit of more safe workability
- ◆ Adopting sequencer ----- possible for setting various printing programs
- ◆ One-touch simple operation method for ink tray ----- improvement of the setting

Specification

	NEAT-70C	NEAT-120C
Printing area	Dia. 60mm	Dia. 100mm
Die size Metal	(W) 100mm (D) 200mm (T) 10mm	(W) 150mm (D) 300mm (T) 10mm
Up/down stroke of pad	35 ~ 100mm	
Positional adjustment of Pad	Forward/backward direction : ± 10 mm / Leftward/rightward direction : ± 25 mm Vertical direction : ± 5 mm / Swiveling : 360°	
Forward/backward stroke of pad	150mm	195mm
Vertical adjustment of work table	0 ~ 140mm	0 ~ 245mm
XY θ table size	(W)120mm (D) 120mm / θ -direction $\pm 3^\circ$ XY-direction ± 10 mm	(W)228mm (D) 105mm / θ -direction $\pm 3^\circ$ Forward/backward direction : ± 30 mm Leftward/rightward direction : ± 10 mm
Printing speed	40 cycle / min Max.	30 cycle / min Max.
Drive system	Air cylinder system	
Fluid for use	Air(0.5MPa), Consumption : Max.4.2NI/cycle	Air(0.5MPa), Consumption : Max.8.8NI/cycle
Input voltage	AC100~240V (free power), 50~60Hz	
Power consumption	approx. 50VA	
Machine dimensions	(W)540mm (D)800mm (H)1,375mm	(W)540mm (D)903mm (H)1,470mm
Machine weight	140kgf	190kgf



ナビタス株式会社のみ認証取得

Navitas NAVITAS CO.,LTD.

9-1 ISHIZUKITAMACHI, SAKAI-KU, SAKAI,
OSAKA 590-0823 JAPAN
Tel : +81-72-243-1122 / Fax : +81-72-245-2555
Web : <http://www.navitas.co.jp/>